
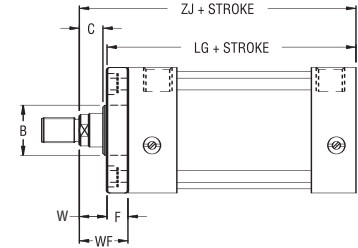




## Head Rectangular Flange (NFFA Type MF1 Mount)



## DIMENSIONS

Mod.	Bore	Rod ø	B	C	E	F	FB	LG+	R	TF	UF	W	WF	ZJ+
<b>E-71-1.50</b>	1½"	5/8"	1½"	3/8"	2"	3/8"	¼"	4"	1.43"	2¾"	3¾"	5/8"	1"	4¾"
<b>E-71-2.00</b>	2"	5/8"	1½"	3/8"	2½"	3/8"	5/16"	4"	1.84"	3¾"	4½"	5/8"	1"	4¾"
	2"	1"	1½"	5/8"	2½"	3/8"	5/16"	4"	1.84"	3¾"	4½"	1"	1¾"	5"
<b>E-71-2.50</b>	2½"	5/8"	1½"	3/8"	3"	3/8"	5/16"	4½"	2.19"	3¾"	4¾"	5/8"	1"	4¾"
	2½"	1"	1½"	5/8"	3"	3/8"	5/16"	4½"	2.19"	3¾"	4¾"	1"	1¾"	5½"
<b>E-71-3.25</b>	3¼"	1"	1½"	5/8"	3¾"	5/8"	3/8"	4¾"	2.76"	4½"	5½"	¾"	1¾"	5½"
	3¼"	1¾"	2"	7/8"	3¾"	5/8"	3/8"	4¾"	2.76"	4½"	5½"	1"	1¾"	5½"
<b>E-71-4.00</b>	4"	1"	1½"	5/8"	4½"	5/8"	3/8"	4¾"	3.32"	5½"	6¼"	¾"	1¾"	5½"
	4"	1¾"	2"	7/8"	4½"	5/8"	3/8"	4¾"	3.32"	5½"	6¼"	1"	1¾"	5½"
<b>E-71-5.00</b>	5"	1"	1½"	5/8"	5½"	5/8"	½"	5½"	4.10"	6½"	7½"	¾"	1¾"	5½"
	5"	1¾"	2"	7/8"	5½"	5/8"	½"	5½"	4.10"	6½"	7½"	1"	1¾"	6½"

## Cap Rectangular Flange (NFFA Type MF2 Mount)

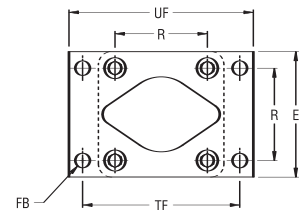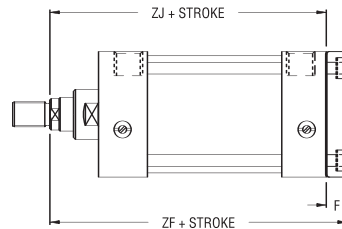

## DIMENSIONS

Mod.	Bore	Rod ø	E	F	FB	R	TF	UF	ZF+	ZJ+
<b>D-71-1.50</b>	1½"	5/8"	2"	3/8"	¼"	1.43"	2¾"	3¾"	5"	4¾"
<b>D-71-2.00</b>	2"	5/8"	2½"	3/8"	5/16"	1.84"	3¾"	4½"	5"	4¾"
	2"	1"	2½"	3/8"	5/16"	1.84"	3¾"	4½"	5¾"	5"
<b>D-71-2.50</b>	2½"	5/8"	3"	3/8"	5/16"	2.19"	3¾"	4¾"	5½"	4¾"
	2½"	1"	3"	3/8"	5/16"	2.19"	3¾"	4¾"	5½"	5½"
<b>D-71-3.25</b>	3¼"	1"	3¾"	5/8"	3/8"	2.76"	4½"	5½"	6¼"	5 5/8"
	3¼"	1¾"	3¾"	5/8"	3/8"	2.76"	4½"	5½"	6½"	5½"
<b>D-71-4.00</b>	4"	1"	4½"	5/8"	3/8"	3.32"	5½"	6¼"	6¼"	5 5/8"
	4"	1¾"	4½"	5/8"	3/8"	3.32"	5½"	6¼"	6½"	5½"
<b>D-71-5.00</b>	5"	1"	5½"	5/8"	½"	4.10"	6½"	7½"	6½"	5½"
	5"	1¾"	5½"	5/8"	½"	4.10"	6½"	7½"	6¾"	6½"