


## Head Trunnion (NFPA Type MT1 Mount)

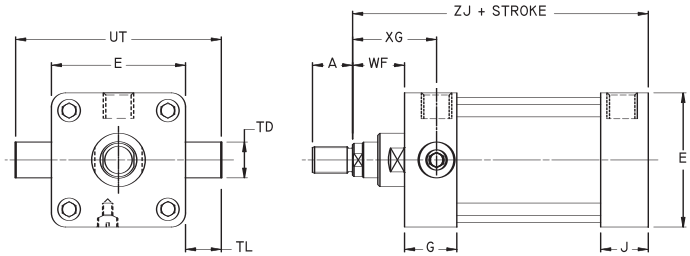


NOTE: ON MT1 THE CUSHION ADJUSTMENT SCREW IS ALWAYS IN POSITION 3.

## DIMENSIONS

Mod.	Bore	Rod ø	A	E	G	J	TD	TL	UT	WF	XG	ZJ+
<b>TH-71-1.50</b>	1½"	⅝"	¾"	2"	1.37"	0.87"	1"	1"	4"	1"	1¾"	4⅝"
<b>TH-71-2.00</b>	2"	⅝"	¾"	2½"	1.33"	0.83"	1"	1"	4½"	1"	1¾"	4⅝"
<b>TH-71-2.50</b>	2"	1"	1⅛"	2½"	1.33"	0.83"	1"	1"	4½"	1⅜"	2⅛"	5"
	2½"	⅝"	¾"	3"	1.38"	0.88"	1"	1"	5"	1"	1¾"	4¼"
<b>TH-71-3.25</b>	2½"	1"	1⅛"	3"	1.38"	0.88"	1"	1"	5"	1⅜"	2⅛"	5⅝"
	3¼"	1"	1⅛"	3¾"	1.61"	1.11"	1"	1"	5¾"	1⅜"	2¼"	5⅝"
<b>TH-71-4.00</b>	3¼"	1⅜"	1⅝"	3¾"	1.61"	1.11"	1"	1"	5¾"	1⅝"	2½"	5⅝"
	4"	1"	1⅛"	4½"	1.61"	1.11"	1"	1"	6½"	1⅜"	2¼"	5⅝"
<b>TH-71-5.00</b>	4"	1⅜"	1⅝"	4½"	1.61"	1.11"	1"	1"	6½"	1⅝"	2½"	5⅝"
	5"	1"	1⅛"	5½"	1.58"	1.06"	1"	1"	7½"	1⅜"	2¼"	5⅝"
	5"	1⅜"	1⅝"	5½"	1.58"	1.06"	1"	1"	7½"	1⅝"	2½"	6⅝"

## Cap Trunnion (NFPA Type MT2 Mount)

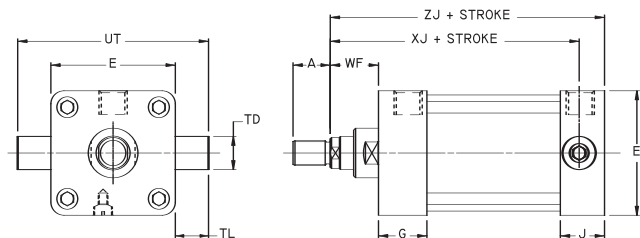

NOTE: ON MT2 THE CUSHION ADJUSTMENT SCREW IS ALWAYS IN POSITION 3.

## DIMENSIONS

Mod.	Bore	Rod ø	A	E	G	J	TD	TL	UT	WF	XJ+	ZJ+
<b>TC-71-1.50</b>	1½"	⅝"	¾"	2"	1.37"	0.87"	1"	1"	4"	1"	4⅝"	4⅝"
<b>TC-71-2.00</b>	2"	⅝"	¾"	2½"	1.33"	0.83"	1"	1"	4½"	1"	4⅝"	4⅝"
<b>TC-71-2.50</b>	2"	1"	1⅛"	2½"	1.33"	0.83"	1"	1"	4½"	1⅜"	4½"	5"
	2½"	⅝"	¾"	3"	1.38"	0.88"	1"	1"	5"	1"	4¼"	4¼"
<b>TC-71-3.25</b>	2½"	1"	1⅛"	3"	1.38"	0.88"	1"	1"	5"	1⅜"	4⅝"	5⅝"
	3¼"	1"	1⅛"	3¾"	1.61"	1.11"	1"	1"	5¾"	1⅜"	5"	5⅝"
<b>TC-71-4.00</b>	3¼"	1⅜"	1⅝"	3¾"	1.61"	1.11"	1"	1"	5¾"	1⅝"	5¼"	5⅝"
	4"	1"	1⅛"	4½"	1.61"	1.11"	1"	1"	6½"	1⅜"	5"	5⅝"
<b>TC-71-5.00</b>	4"	1⅜"	1⅝"	4½"	1.61"	1.11"	1"	1"	6½"	1⅝"	5¼"	5⅝"
	5"	1"	1⅛"	5½"	1.58"	1.06"	1"	1"	7½"	1⅜"	5¼"	5⅝"
	5"	1⅜"	1⅝"	5½"	1.58"	1.06"	1"	1"	7½"	1⅝"	5½"	6⅝"